

60%
Power Savings




5 Years
Warranty

Energy efficient lighting specifically for Pathways & Corridors.

SPECIFICATIONS

Input power	: Single phase 50Hz, 150V - 275V AC (or) 24V DC with battery backup
Power consumption of each module	: 2W
Average LUX (Ceiling height-8ft, units placed between a distance of 8 to 15ft)	: 5 to 15Lux
Lumen output	: 150Lumens
Color temperature	: 6000K - 6500K
Colour rendering index	: ≥75
Color	: White
Operating temperature	: 0 to 60°C

LUX Distribution Pattern

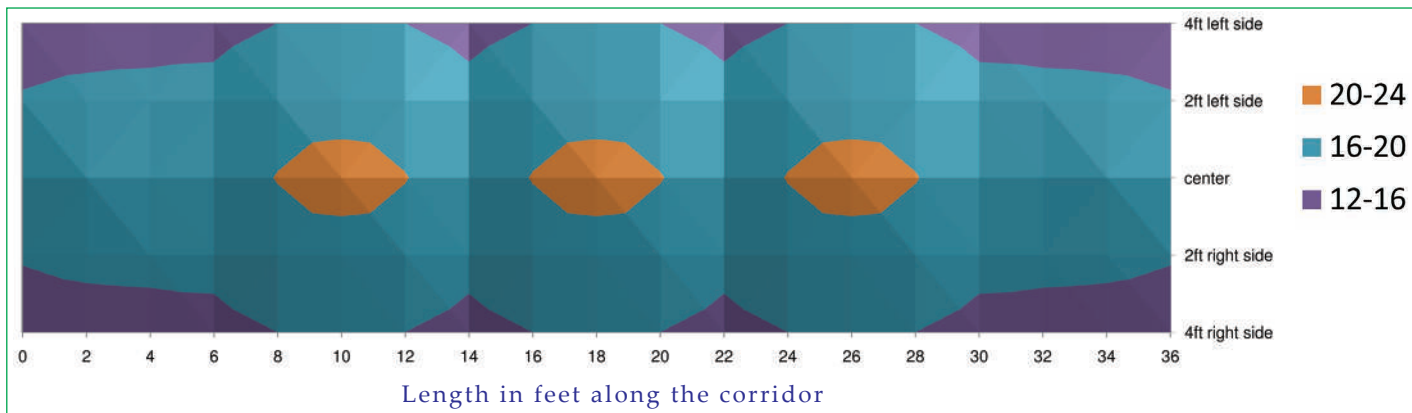

* The specifications are subjected to change. Before finalizing the product, please contact us.